


PE GRIP Coupling & Adaptor

FOR PE PIPES d63 TO d315

UP TO PN16 FOR WATERWORKS

FUSION BONDED EPOXY (FBE) COATED

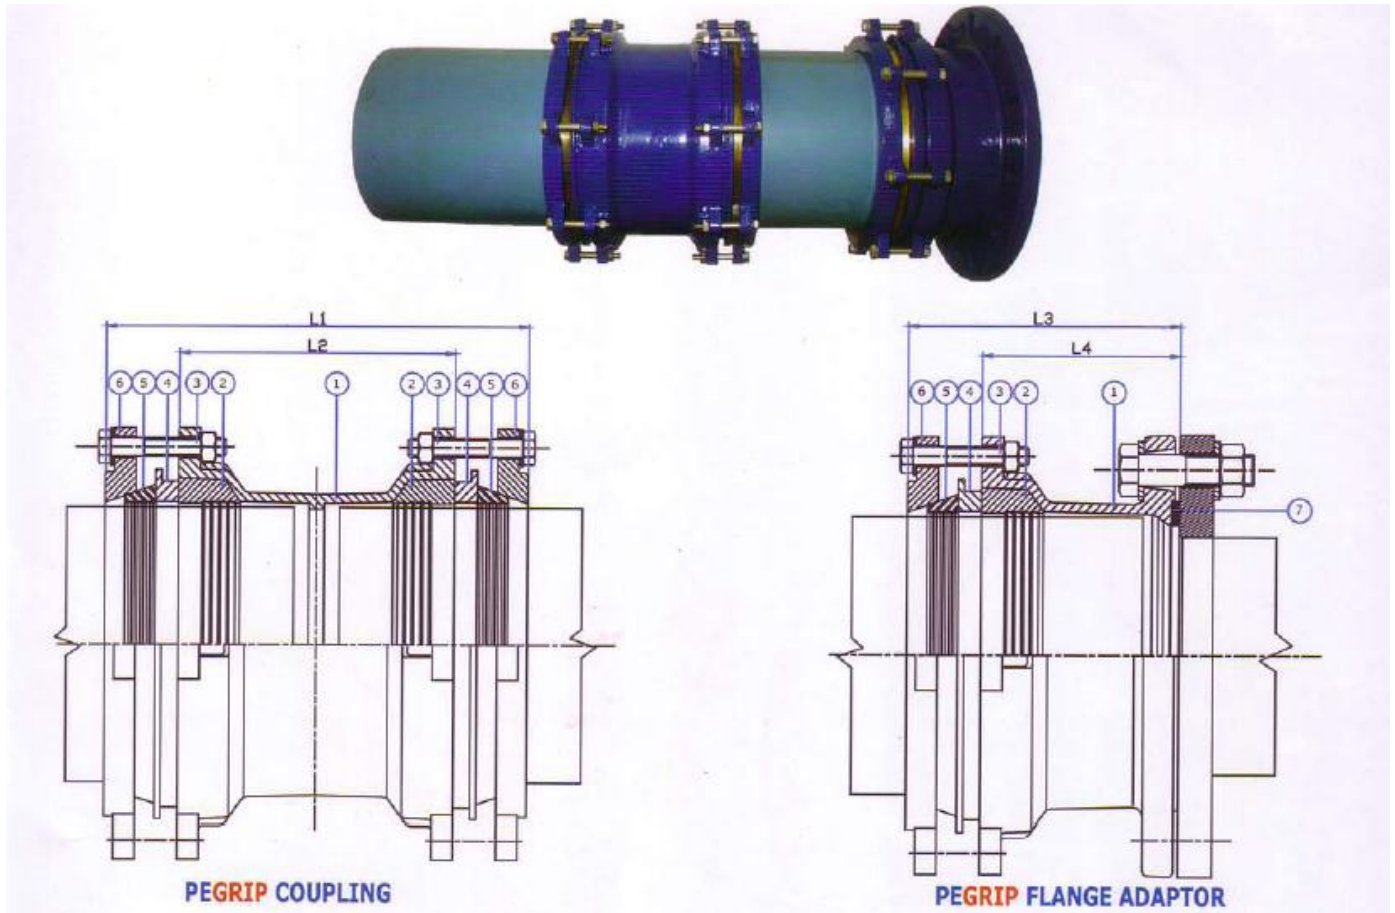

- Easy to install, dismantle and maintain in all weather conditions.
- Provide total restraint.
- No special tool or equipment required.
- Corrosion protection with Fusion Bonded Epoxy (FBE) Coating.

PEGRIP COUPLING				PEGRIP FLANGE ADAPTOR				FLANGE INFOR.			
SIZE DN	L1	L2	BOLTS DIA x NO	FLANGE DN	L3	L4	BOLTS DIA x NO	PN	TABLE D	TABLE E	ANSI 150
63	214	130	M12 X 6	80	107	65	M12 X 3	*			*
90	232	140	M12 X 6	80	115	70	M12 X 3	*			*
110	241	146	M12 X 6	100	120	73	M12 X 3	*	*	*	*
125	245	150	M12 X 6	100	158	110	M12 X 3	*	*	*	*
160	272	174	M12 X 8	150	138	90	M12 X 4	*			*
180	282	180	M12 X 8	150	176	125	M12 X 4	*			*
225	309	200	M12 X 10	200	185	125	M12 X 5	*	*	*	*
250	323	200	M12 X 10	250	192	130	M12 X 5	*		*	*
280	332	200	M12 X 10	250	206	140	M12 X 5	*		*	*
315	348	210	M12 X 16	300	219	150	M12 X 8	*	*	*	*

No	Component	Material
1	Body	Ductile Iron, BS EN 1563 Grade 450/10
2	Gasket	EPDM, BS EN 681-1 Type WA
3	Bolts / Nuts	SS, ANSI 304 Grade A2-70 / St Gr 8.8 Decromat Coated
4	Intermediate Ring	Ductile Iron, BS EN 1563 Grade 450/10
5	Grip Ring	MS 58 (Dezindfication Resistant Brass) Rg7 for DN315 only.
6	End Ring	Ductile Iron, BS EN 1563 Grade 450/10
7	Flange Gasket	EPDM, BS EN 681-1 Type WA

SERVICE CONDITIONS	
Service Temperature Range	-20° C to 70° C
Maximum Working Pressure	16 bars



Piping Technology Sdn Bhd

No. 6, Jalan Apollo U5/193, Bandar Pinggiran Subang, 40150 Shah Alam, Selangor, Malaysia.

HP : +6012 254 2399 Tel : +603 7831 6833 Fax : +603 7831 6933 email : pipingtec@gmail.com